

SYNTHESIZED INTEGRA-TR INTEGRATED WIRELESS MODEM

132-174 MHz
380-512 MHz
928-960 MHz



Dataradio's Integra-TR is an integrated wireless modem that provides advanced features without complicated system setup. The new slim enclosure with optional DIN-rail mounting makes system design and integration easier. With up to 5 watts RF output in UHF, VHF, and 900 MHz, the Integra-TR offers the most popular features required for telemetry and SCADA systems.

Remote Online Diagnostics Integra-TR's diagnostic feature provides the information to monitor and maintain your communications link. Power, temperature, voltage, signal strength, antenna/feedline condition, and data decode performance are transmitted online without application interruption. Integra-TR's diagnostic output supports the OPC Enabled Diagnostics feature.

Multi-channel capability under system PLC control provides advanced RF network monitoring.

Digital I/O The Integra-TR's Digital I/Os provide the interface to operate switches, relays and sensors.


Two-Year Warranty The Integra-TR is backed by our standard two-year warranty.

Programmable, transparent modem The Integra-TR provides virtually real-time data transfer, superior to packetized data systems. Integra-TR's features include CWID for identification and CSMA to minimize retries and reduce channel interference. The Integra-TR delivers error-free data at up to 19200 bps over the air in a 25 kHz channel, 9600 bps in a 12.5 kHz channel, or 4800 bps in a 6.25 kHz channel.

No dribble bits The Integra-TR prevents transmission of any extraneous data bits to the terminal device. This makes the Integra-TR a perfect choice when working with various protocols that cannot tolerate any extra data bits.

DOX The data-activated transmit mode automatically activates the transmitter in the presence of data without needing an RTS handshake from the terminal equipment. Integra-TR supports CTS flow control for cases where the terminal rate exceeds the network rate.

System Diagram

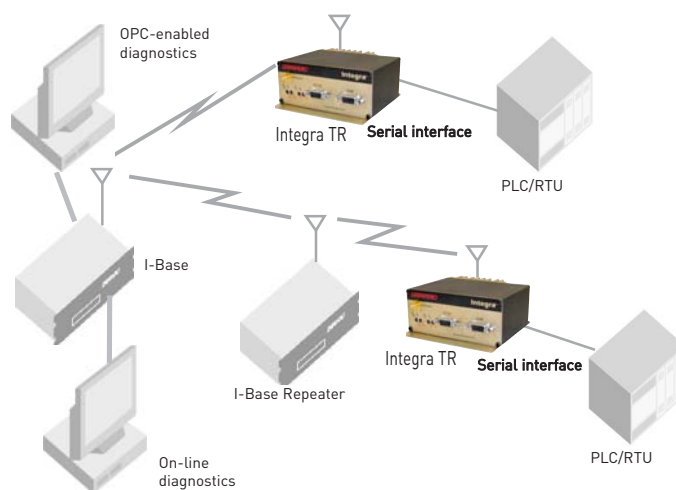

INTEGRA-TR SPECIFICATIONS

MODEM

Channel Bandwidth	6.25 kHz	12.5 kHz	25 kHz
Data Rate (PC programmable)	2400, 4800 bps	4800, 9600 bps	4800, 9600, 19200 bps
Modulation	DRCMSK		
RTS/CTS Delay	4 msec		
Sensitivity (1 x 10 ⁻⁶)	@.35 µV (2400 bps)	@1.4 µV (9600 bps)	@1.0 µV (9600 bps) @2.3 µV (19,200 bps)

RS-232 PORTS

COM Port	
Interface	EIA RS-232C
Data Rate	1200 - 19200 bps
Protocol	Transparent: 7 or 8 data bits; 1 or 2 stop bits; even, odd or no parity
Setup / Diagnostic Port	
Data Format	Proprietary binary for setup, ASCII for diagnostics
Data Rate	9600 bps

GENERAL

Band	UHF	VHF	900 MHz ⁺
Frequency Range	380-512 MHz [±]	132-174 MHz	928-960 MHz
Channel Bandwidth	6.25*, 12.5 or 25 kHz	6.25*, 12.5 or 25 kHz	12.5 or 25 kHz
FCC Type Acceptance	NP4MCUB5Q (6.25 kHz) EOTMCUB5R	NP4MCUA5Q (6.25 kHz) EOTMCUA5R	EOTMCUC5R
FCC Emission Designators	6K00FID (6.25 kHz) 9K30FID, 15K3FID	6K00FID (6.25 kHz) 9K30FID, 15K3FID	9K30FID, 15K3FID
IC Type Acceptance	773195561A	773195562A	773195611A
IC Emission Designators	9K30F1D, 15K3F1D	9K30F1D, 15K3F1D	9K30F1D, 15K3F1D
European Approval	CE Mark (403-470MHz) [!] ETSI 300.113(403-470MHz) [!]	CE Mark [!] ETSI 300.113 [!]	
Current Drain			
Transmit @ 13.3 VDC	<2.6A		
Receive @ 13.3 VDC	<220 mA (with terminal connected to COM port)		
Frequency Tolerance	0.5 ppm (6.25 kHz) 1.5 ppm	1.0 ppm (6.25 kHz) 2.5 ppm	1.5 ppm
Operating Voltage	10-16 VDC		
Operating Temperature	-30° C to +60° C		
Dimensions (W x H x D)	4.5" x 2.0" x 4.75" (11.4 cm x 5.0 cm x 12.1 cm)		
Shipping Weight	1.50 lbs. (0.68 kg)		
Operating Mode	Simplex or half-duplex		

TRANSCEIVER

Bandwidth (without tuning)	450-470 MHz: 20 MHz all other ranges: 16 MHz	132-150: 18 MHz 150-174: 24 MHz	928-960: 32 MHz
RF Output Power	1-5 watts, PC programmable		
Duty Cycle	50% @ 5 watts, 30 seconds maximum transmit - extended transmit with cooling fan option		

[±] 380-403 MHz frequency band is not FCC or IC type approved. * 6.25 operation @ 450-470 UHF or 150-174 VHF

[!] CE approval is limited to 4800 bps in a 12.5 kHz channel. ⁺ UHF and VHF Integra manufactured in new case. The 900 MHz model will remain in the original case.

000-0000-165 10/05 Printed in USA

©2000 Dataradio COR Ltd. Dataradio is a registered trademark of Dataradio Inc. Specifications are typical and subject to change without notice. Actual performance may vary due to RF propagation and environmental conditions. Refer to the Integra-TR installation manual for unit performance specifications. Integra-TR mechanical layout not to scale

COM AND SETUP PORTS

Connectors:DE-9F

Pin Description

- 1 DCD: Data Carrier Detect
- 2 RXD: Receive Data
- 3 TXD: Transmit Data
- 4 DTR
- 5 Ground
- 6 DSR
- 7 RTS: Request to Send
- 8 CTS: CLeat to Send
- 9 Not Used


POWER - I/O CONNECTOR:

Snap and lock 4-pin

Pin Description

- 1 +13.3 VDC (red)
 - 2 Ground (black)
 - 3 Analog In / Digital Out 1(green)
 - 4 Analog In / Digital Out 2 (white)
- Rx-TP

MECHANICAL SPECIFICATIONS:

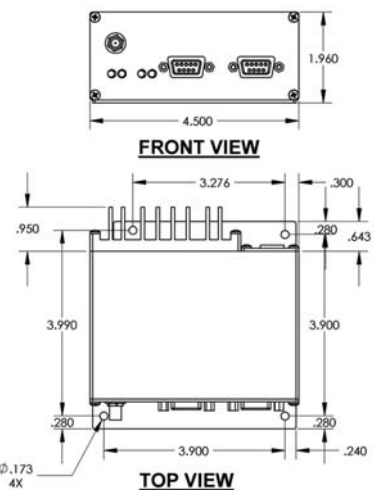

Note: New 4-hole mounting plate will fit original case 3-hole pattern without modification.